

型號 (示例)

T6CLP

低噪聲葉片泵 安裝法蘭 SAE C, 2 螺孔。

排量: ml / rev

003 = 10.8, 005 = 17.2, 006 = 21.3, 008 = 26.4, 010 = 34.1, 012 = 37.1, 014 = 46.0,
017 = 58.3, 020 = 63.8, 022 = 70.3, 025 = 79.3, 028 = 88.8, 031 = 100.0

傳動軸形式:


-2	NO SAE 平鍵
-5	NO SAE 平鍵

轉向:

R: 右轉 (順時針) L: 左轉 (逆時針)

油口方向組合

S = 進油口, P = 出油口

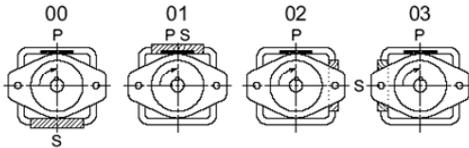

-022 **-5** **R** **00** **-B** **1** **M0**

油口連接螺紋

公制	美制
M0	00 略


密封等級

1: S1 礦物液壓油
5: S5 適合於礦物
基與抗燃液壓油


設計序號

B: 由生產商給定

INTERNAL LEAKAGE (TYPICAL)

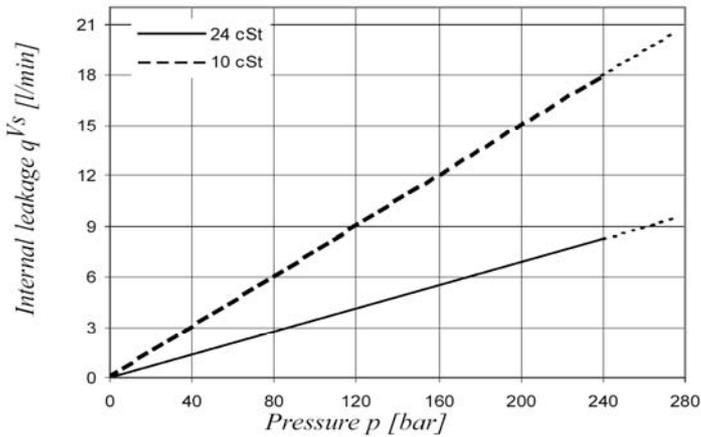


NOISE LEVEL (TYPICAL)

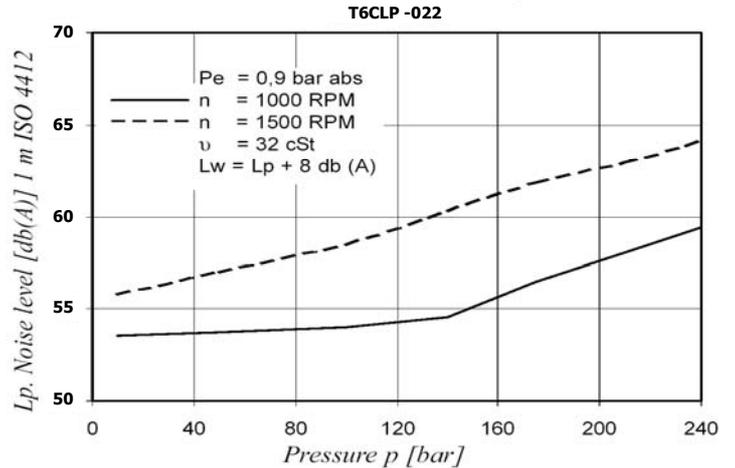


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.





HYDROMECHANICAL POWER LOSS (TYPICAL)

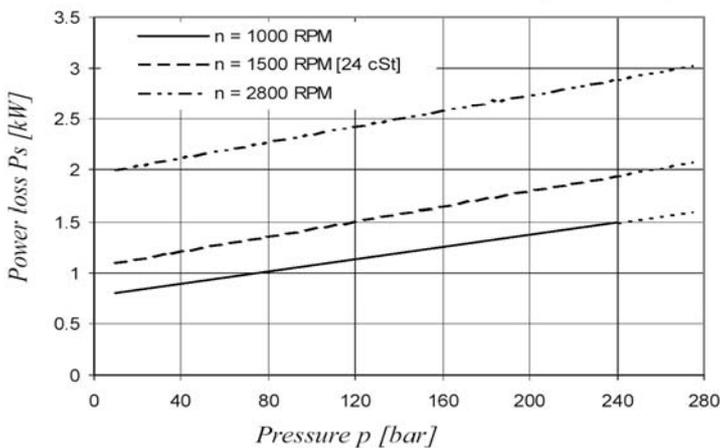

PERMISSIBLE RADIAL LOAD

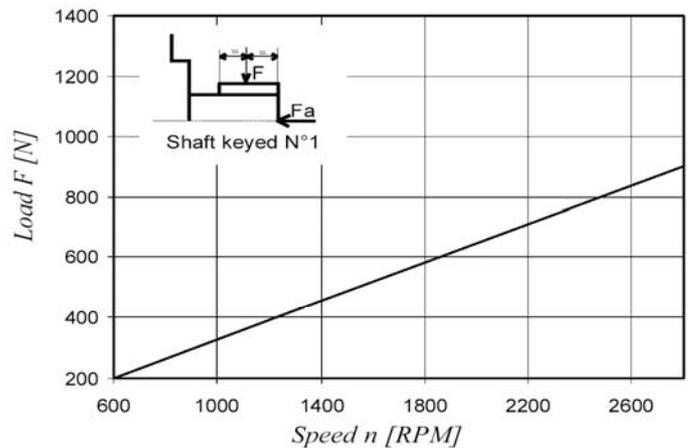

Maximum permissible axial load Fa = 800 N

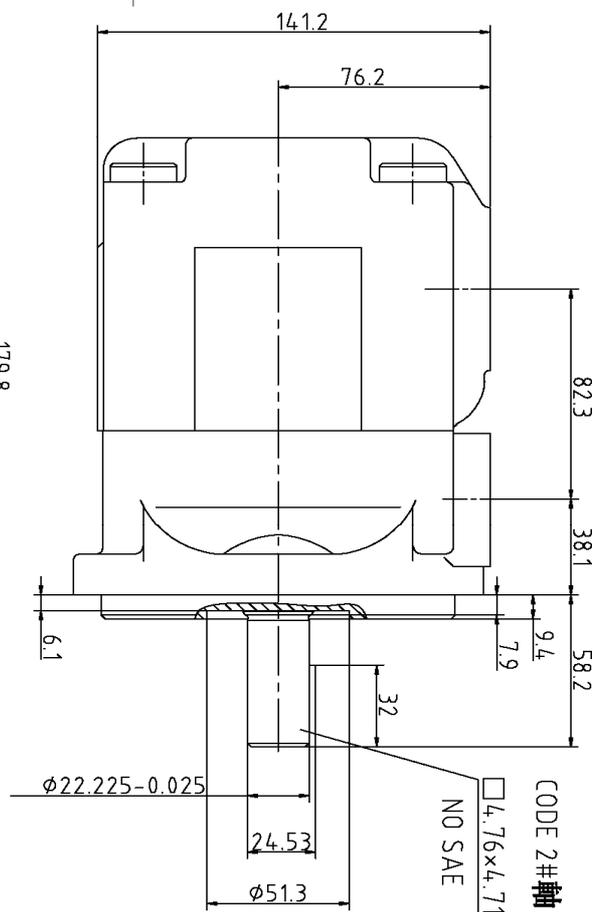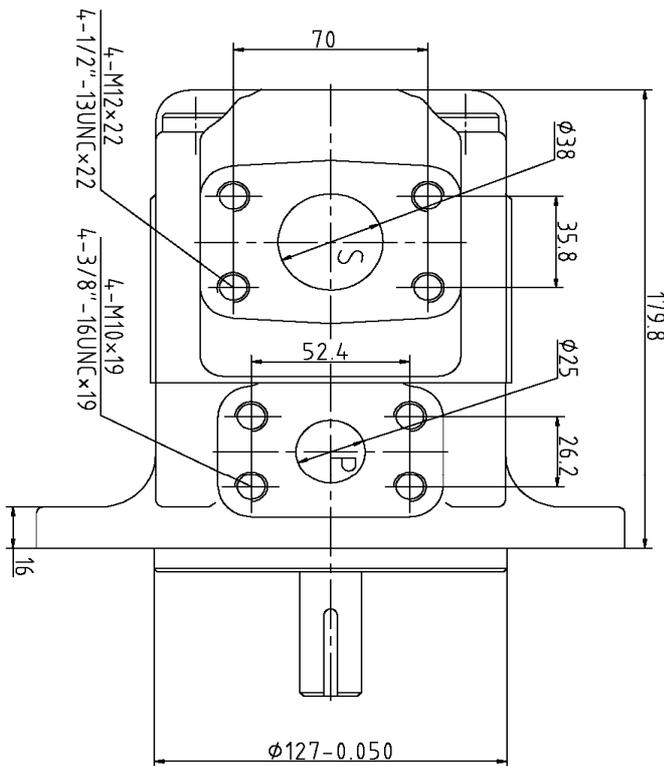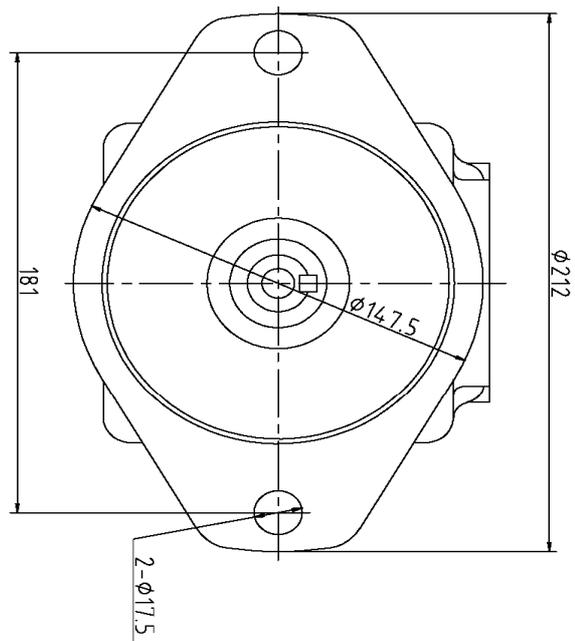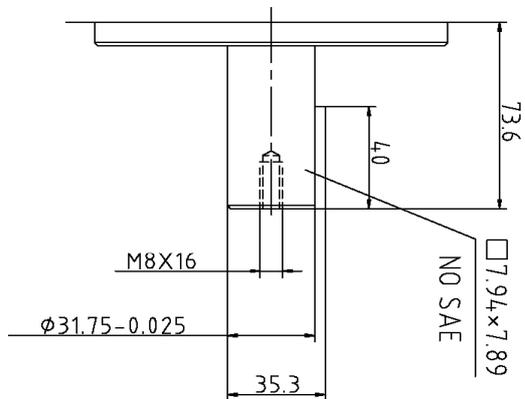

Shaft Torque Limits [ml/rev x bar]		
Model	Shaft No.	Vi x p Max.
T6CLP	#2	14,300
	#5	21,800