

T7DL 單聯泵型號說明

型號 (示例)

T7DL

-B28

-2

R

00

-A

1

00

低噪聲葉片泵 安裝法蘭 SAE C, 2 螺孔。

排量: ml/rev

B14=43.2, B17=54.0, B20=64.8, B22=70.3, B24=79.6, B28=88.4,
B31=97.4, B35=111.4, B38=118.5, B42=135.3, B45=145.7, B50=158.0

傳動軸形式:


-1	SAE C 平鍵	-3	SAE C 花鍵
-2	NO SAE 平鍵	-4	NO SAE 花鍵

轉向:

R: 右轉 (順時針) L: 左轉 (逆時針)

油口方向組合:

S = 進油口, P = 出口口

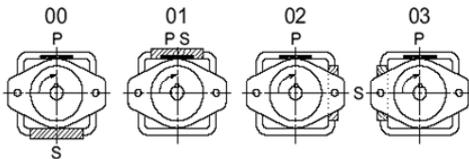

油口連接螺紋

公制	美制
M0	00


密封等級

- 1: S1 礦物液壓油
- 5: S5 適合於礦物
基與抗燃液壓油

設計序號

A: 由生產商給定


INTERNAL LEAKAGE (TYPICAL)

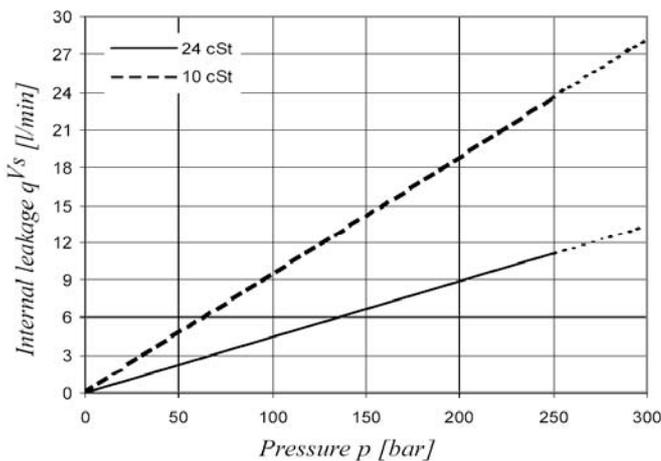


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.

NOISE LEVEL (TYPICAL)


T7DL -B31

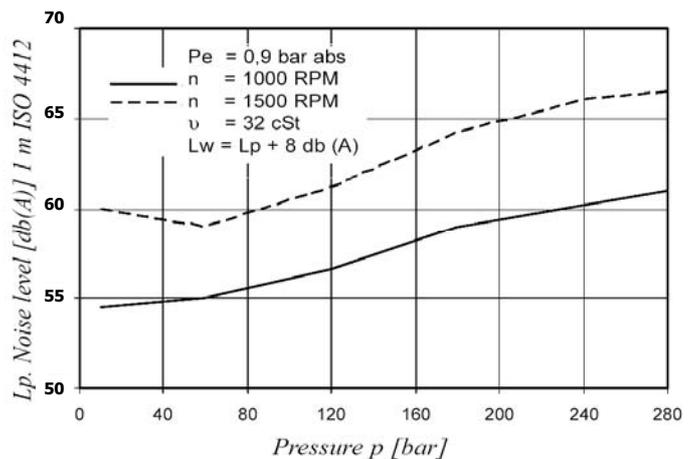

HYDROMECHANICAL POWER LOSS (TYPICAL)

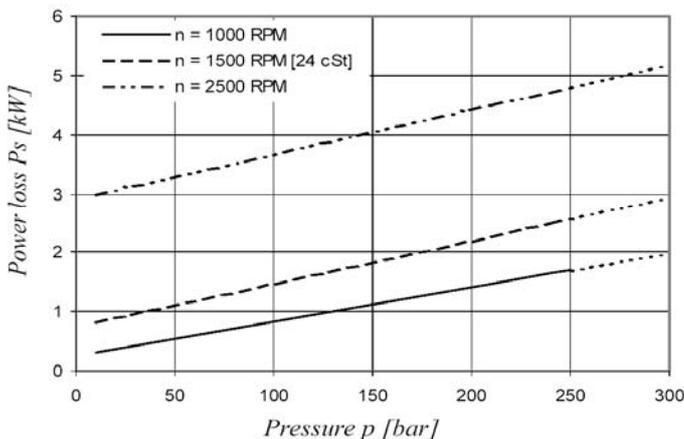

PERMISSIBLE RADIAL LOAD

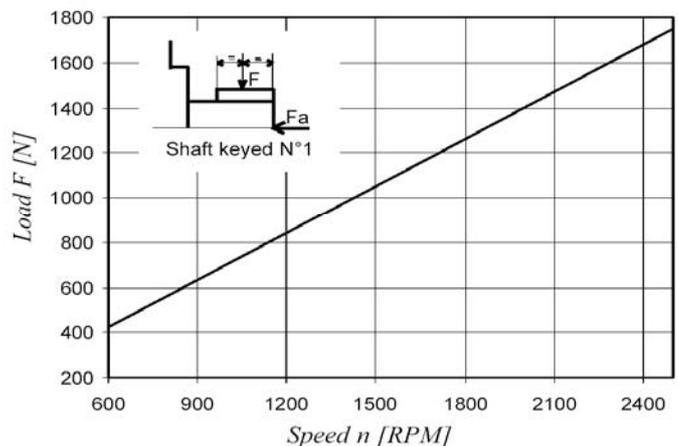

Maximum permissible axial load $F_a = 1200 \text{ N}$

